

## SPECIFICATIONS

### GNSS Features

Channels.....	1760
GPS.....	L1C/A, L1C, L2C, L2P, L5
GLONASS.....	L1C/A, L2C/A, L2P, L3CDMA
BDS.....	B1I, B1C, B2I, B2a, B3
GALILEO.....	E1, E5A, E5B, E5AltBOC, E6 <sup>[1]</sup>
SBAS.....	EGNOS, WAAS, GAGAN, MSAS, SDCM(L1,L5)
QZSS.....	L1C/A, L1C, L2C, L5, L6
Navic.....	L5
On module L-Band (Reserve)	
Positioning output rate.....	1Hz~50Hz
Initialization time.....	< 10s
Initialization reliability.....	> 99.9%

### Positioning Precision\*

Real-time kinematic.....	Horizontal: 6 mm + 0.5 ppm RMS	Vertical: 10 mm + 1 ppm RMS
(Baseline<40km)		
GNSS static.....	Horizontal: 2.5 mm + 0.5 ppm RMS	Vertical: 5 mm + 0.5 ppm RMS
Standalone.....	Horizontal: 1.2m	Vertical: 1.9m RMS
DGNSS.....	Horizontal: 0.4m	Vertical: 0.7m RMS
SBAS positioning.....	Horizontal: 0.6m	Vertical: 0.8m RMS
RTK initialization time.....	2 ~ 8s	
IMU tilt compensation.....	Additional horizontal pole tip uncertainty typically less than 10mm + 0.7 mm/° tilt down to 30°	
IMU tilt angle.....	0° ~ 60°	

### Hardware Performance

Dimension.....	130.5mm(φ) × 84mm(H)
Weight.....	850g (battery included)
Material.....	Magnesium aluminum alloy shell
Operating temperature.....	-25°C ~ +65°C
Storage temperature.....	-35°C ~ +80°C
Humidity.....	100% Non-condensing
Waterproof/Dustproof.....	IP68 standard, protected from long time immersion to depth of 1m
	IP68 standard, fully protected against blowing dust
Shock/Vibration.....	Withstand 2 meters pole drop onto the cement ground naturally
Power supply.....	6-28V DC, overvoltage protection
Battery.....	Inbuilt 6800mAh rechargeable, Li-ion battery
Battery life.....	Single battery: 16h (static mode)
	8h (Base + UHF)
	12h (Rover + UHF), 15h (Rover + Bluetooth)

### Communications

I/O Port.....	5PIN LEMO external power port + Rs232
	Type-C interface (charge + OTG + Ethernet)
	1 UHF antenna interface
	SIM card slot (Micro SIM)
Internal UHF.....	1W receiver and transmitter
Frequency range.....	410 - 470MHz
Communication protocol.....	Farlink, Trintalk450s, SOUTH, HUACE, Hi-target, Satel
Communication range.....	Typically 8km with Farlink protocol
Cellular mobile network.....	4G cellular module standard, customizable 5G module
Bluetooth.....	Bluetooth 3.0/4.1 standard, Bluetooth 2.1 + EDR
NFC Communication.....	Realizing close range (shorter than 10cm) automatic pair between receiver and controller (controller requires NFC wireless communication module else)

### WiFi

Modem.....	802.11 b/g standard
WiFi hotspot.....	Receiver broadcasts its hotspot form web UI accessing with any mobile terminals
WiFi datalink.....	Receiver can transmit and receive correction data stream via WiFi datalink

### Data Storage/Transmission

Storage... 8GB SSD internal storage standard, extendable up to 64GB	
Automatic cycle storage (The earliest data files will be removed automatically while the memory is not enough)	
Support external USB storage	
The customizable sample interval is up to 20Hz	
Data transmission.....	Plug and play mode of USB data transmission
	Supports FTP/HTTP data download
Static data format.....	STH, Rinex2.x, Rinex3.x
Differential data format.....	CMR, RTCM 2.x, RTCM 3.x(MSM included)
Position output data format.....	NMEA 0183, PJK plane coordinate, SBF
Network model supports.....	Fully support NTRIP protocol

### Sensors

Electronic bubble.....	Controller software can display electronic bubble, checking leveling status of the carbon pole in real-time
IMU.....	Built-in IMU module, calibration-free and immune to magnetic interference
Thermometer.....	Built-in thermometer sensor, adopting intelligent temperature control technology, monitoring and adjusting the receiver temperature

### User Interaction

Operating system.....	Linux
Buttons.....	Single button
Indicators.....	5 LED indicators
Web interaction.....	With the access of the internal web interface management via WiFi or USB connection, users are able to monitor the receiver status and change the configurations freely
Voice guidance.....	It provides status and operation voice guidance, and supports Chinese/English/Korean/Spanish/Portuguese/Russian/Turkish
Secondary development.....	Provides secondary development package, and opens the OpenSIC observation data format and interaction interface definition
Cloud service.....	The powerful cloud platform provides online services like remote manage, firmware update, online register and etc.

[1]Hardware is ready

\*The data comes from the SOUTH GNSS product laboratory, and the specific situation is subject to local actual usage. The measurement accuracy, precision and reliability are associated to various factors, including number of satellite tracking, observation time, multi-path, etc.



**SOUTH**  
Target your success

# GALAXY G2

— Brand new diminutive RTK receiver —




**Simple and elegant  
without losing precision**

**SOUTH**  
Target your success

**SOUTH SURVEYING & MAPPING TECHNOLOGY CO., LTD.**

Add: South Geo-information Industrial Park, No.39 Si Cheng Rd, Guangzhou, China  
Tel: +86-20-23380888 Fax: +86-20-23380800  
E-mail: mail@southsurvey.com export@southsurvey.com impexp@southsurvey.com gnss@southsurvey.com  
http://www.southinstrument.com http://www.southsurvey.com

850g

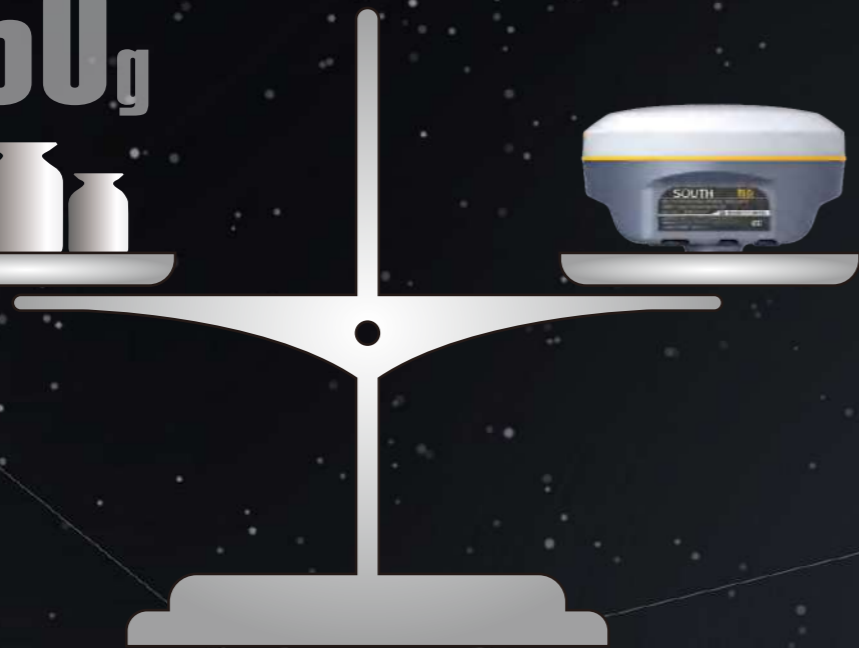

## Ingenious & stylish design

With highly integrated and layered design, Galaxy G2 is smaller than typical Galaxy series receivers. And coupled with the magnesium alloy body shell, the weight of G2 is only **850g** including internal battery, extremely light and convenient to carry.

## The extraordinary inbuilt radio


Galaxy G2 adopts a new self-developed digital radio module with “**Farlink**” protocol to achieve the typical working range as 8km. The transmission bandwidth of “**Farlink**” becomes large, which perfectly solves the problem of large data volume of multiple constellations transmission. And the power consumption can reduce about 60% in the same amount of data transmission compare to the traditional RTK.



8KM

## Ultimate goals of full signals tracking

Galaxy G2 adopts high and low frequency integrated antenna design, which using low profile design technology to reduce the physical difference between high and low frequency bands, improves phase center consistency. And the applied frequency selective radiation mechanism would enhance antenna anti-interference ability. And combines with high-performance GNSS board, G2 fully supports all of running satellite constellations, especially BeiDou III global satellite signals.

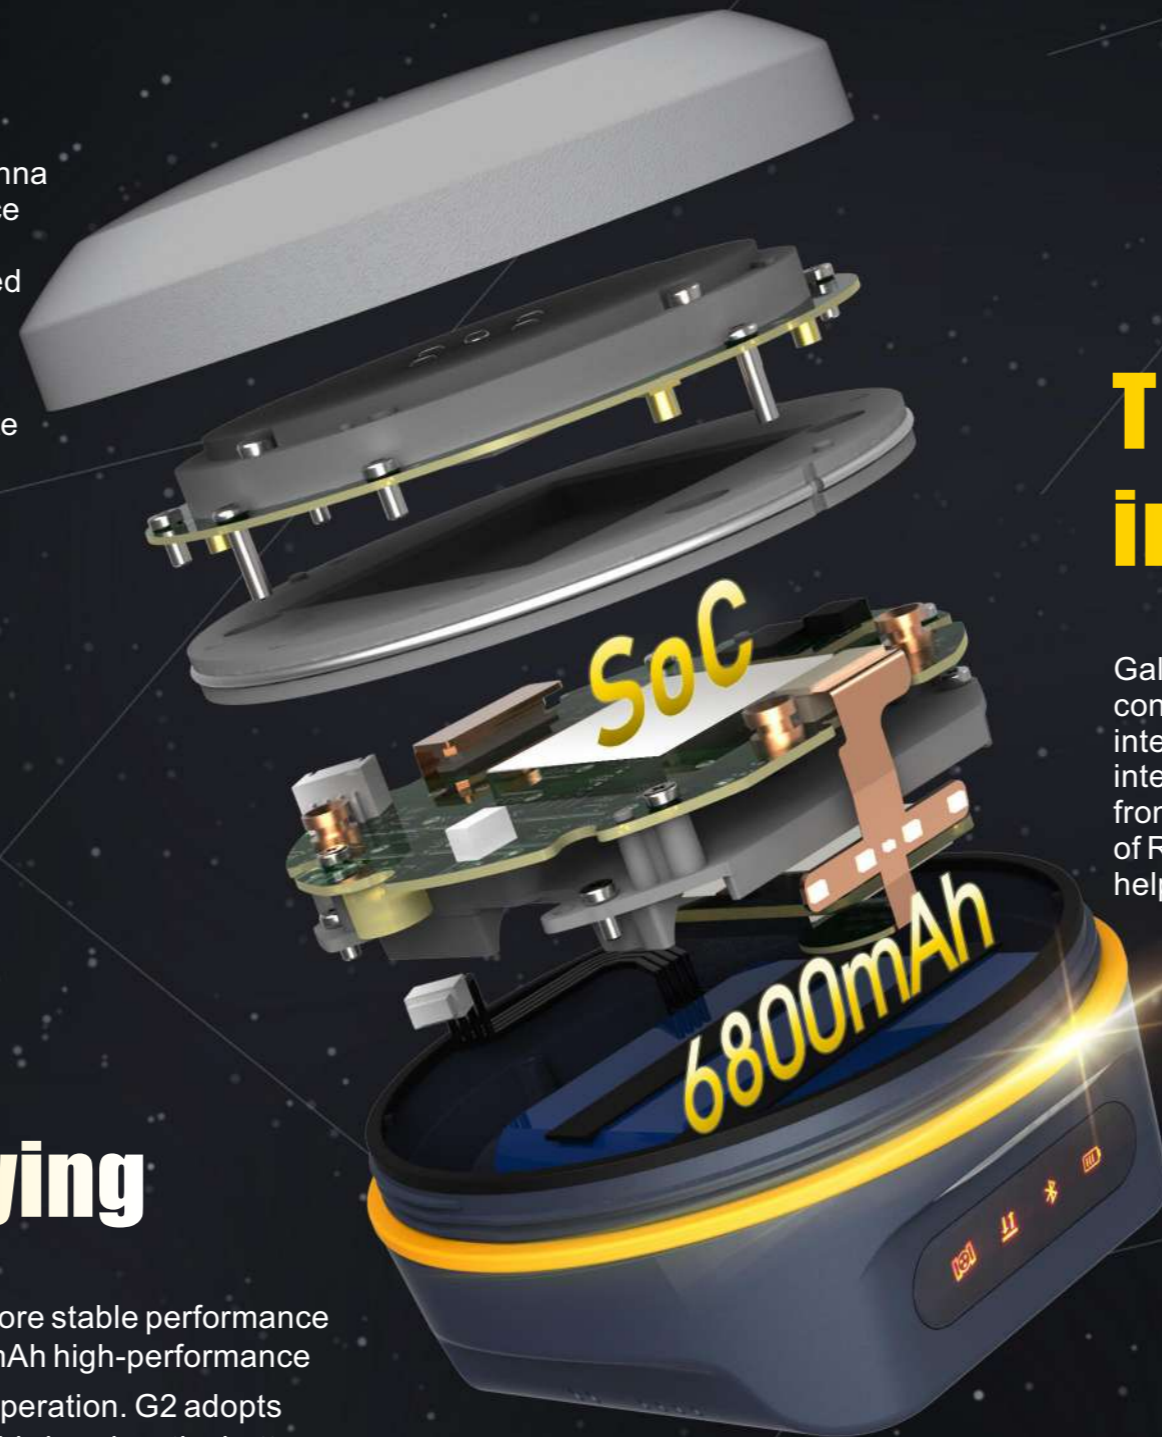

## The fact moving ahead into the future

Galaxy G2 is integrated with a brand new multi-frequency, multi-constellation GNSS board which comes with the advantage of high integration and low power consumption, efficiently suppress the interference signals, and obtain higher quality observation data from satellite constellations. G2 will bring a leap-forward experience of RTK performance, even in the toughest conditions, G2 would help you to complete the projects with high quality and efficiency.

## Worry-free surveying

The new generation of SoC platform gives RTK more stable performance and lower power consumption. The built-in 6800mAh high-performance battery can support **15 hours\*** of continuous operation. G2 adopts Type-C charging interface which supports PD rapid charging, the battery can be full charged in 3 hours that supports full-day work.

\* Working time should depend on the use of datalink on Rover, generally, the typically working time of Bluetooth mode is around 15hrs.

## Measure whatever you want

Galaxy G2 is integrated with a new generation **Inertial Measurement Unit(IMU)** which makes tilt measurement more stable and accurate, the coordinates would be corrected automatically according to the inclination direction and angle of the pole, without strict leveling the receiver to measure the point at will, it helps surveyors boost productivity by 30 percent.



## Smart reminder of base station attitude

Built-in high-precision tilt attitude module which associates with receiver attitude, when the base station moves or falls, it can accurately distinguish and promptly remind.