




## Galaxy G5

*Improving Never Stops*

Galaxy G5 is designed to enhance your performance in the field survey and to provide the most reliable positioning result.

It integrates a 1760 channels world leading GNSS positioning engine, a high precision IMU, a long range UHF radio, and a new interact operating system.

More features are to be discovered by you...

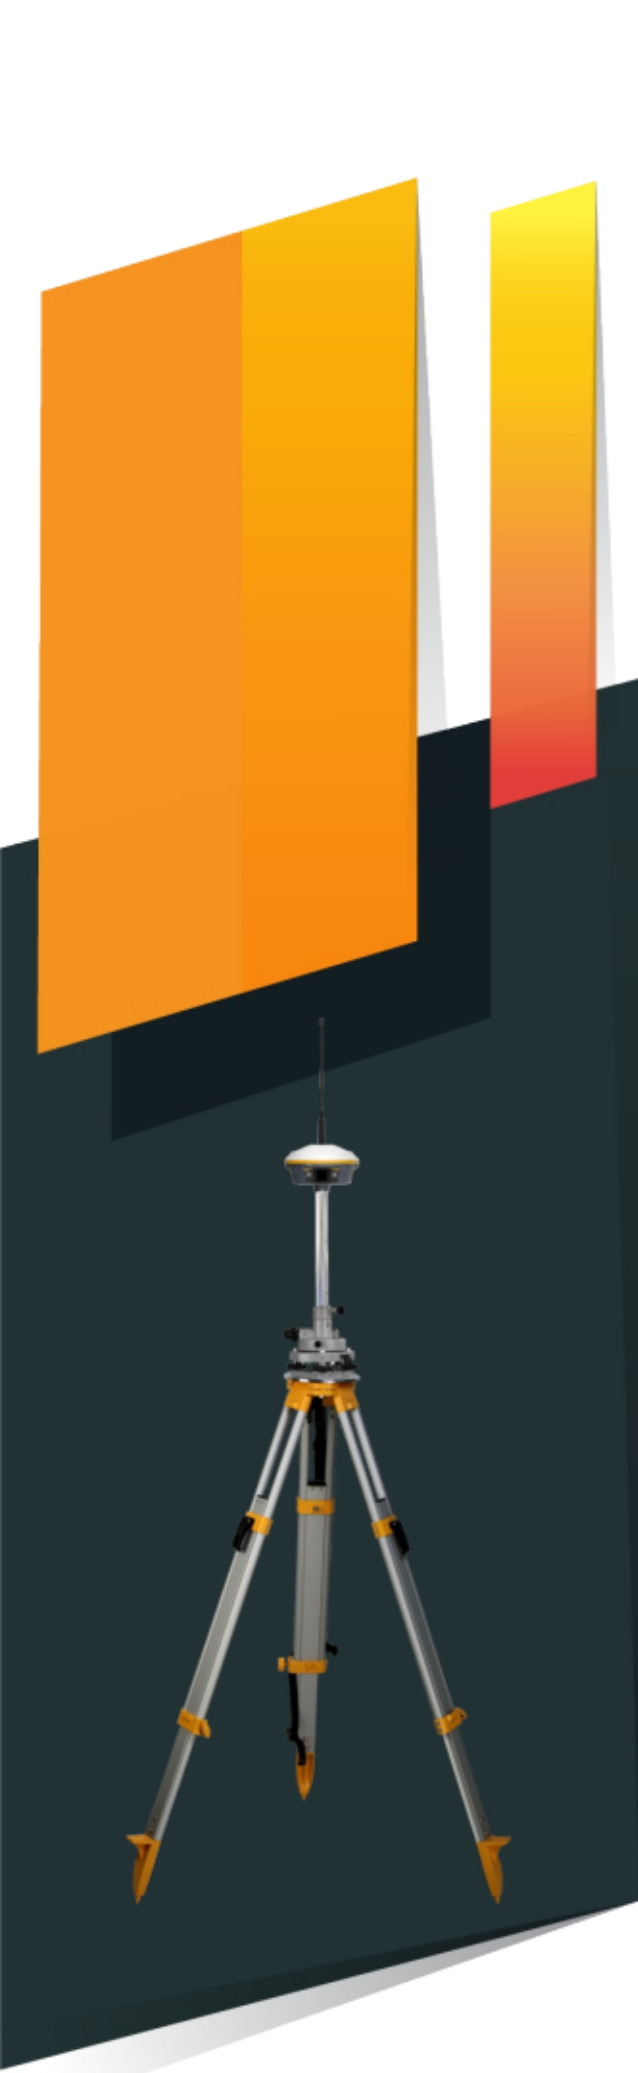

### More channels and all constellations tracking

With 1760 GNSS channels solution, Galaxy G5 can support multi-constellation and multi-frequency tracking with the help of high-performance GNSS antenna.

### Color touch screen, makes workflow simpler

HD 1.3-inch color LCD touch screen with high brightness and low power consumption, which is convenient and efficient to complete touch settings, information browsing, function settings.

### More powerful inbuilt radio

Coupling a high-performance UHF module with Farlink communication technology, which increases signal sensitivity and transmission efficiency, Galaxy G5 really achieves the goal of a 10-15km ultra-long-distance working range. And the power consumption of this carrying new generation module is 60% lower than additional UHF, making the Base working time is much longer.

### Superior Endurance, Up to 25 hours working

Galaxy G5 uses a built-in 10000mAh ultra-large capacity Li-ion battery, which can last 25 hours of continuous work (Static) benefits from low power consumption circuit design. The Type-C interface is used on G5 that it can support fast charging through a charger with PD protocol, and it can be full charged in 4 hours.

### Double data backup

The measured data can be simultaneously stored into both internal memory of receiver and controller, realizing the measured data double backup, which effectively avoid data loss.

### Outstanding IMU measurement

Built-in 4<sup>th</sup>-generation IMU automatic compensator corrects the coordinates to the pole tip, assisting surveyors to quickly and accurately measure or stake out point at will without strictly leveling the receiver, the tilt angle range can achieve up to 60°.

### Upward and hidden UHF antenna design

Upward UHF antenna design, achieving all-direction UHF signal receiving and transmitting. And the antenna interface is hidden into top cover that effectively avoid accident breaking, protect from water and dust.

### Intelligent base signal locking technology

Using one-to-one signal tracking and locking technology, and the independent frequency under Farlink protocol, the G5 rover can continuously lock and capture the target base station signal to reduce cross-frequency interference even though other base stations are working nearby with the same channel.

### Smart system management-ROS

Galaxy G5 is integrated with the ROS system, which comes with intelligent deployment of multi-mode hardware components, strong computing power and an intelligent scheduling mechanism, and coupling with an ultra-fine memory management mechanism, making the fluency and running speed of the receiver comprehensively improved.

## SPECIFICATIONS

### GNSS Features

Channels.....	1760
GPS.....	L1C/A, L1C, L2C, L2P, L5
GLONASS.....	L1C/A, L2C/A, L2P, L3CDMA
BDS.....	B1I, B1C, B2I, B2a, B3
GALILEO.....	E1, E5A, E5B, E5ArBOC, E6
SBAS.....	EGNOS, WAAS, GAGAN, MSAS, SDCM(L1,L5)
QZSS.....	L1C/A, L1C, L2C, L5, L6
Navic.....	L5
On module L-Band (Reserve)	
Positioning output rate.....	1Hz~50Hz
Initialization time.....	< 10s
Initialization reliability.....	> 99.9%

### Positioning Precision\*

Real-time kinematic.....	Horizontal: 6 mm + 0.5 ppm RMS	Vertical: 10 mm + 1 ppm RMS
(Baseline<40km)		

GNSS static.....	Horizontal: 2.5 mm + 0.5 ppm RMS	Vertical: 5 mm + 0.5 ppm RMS
------------------	----------------------------------	------------------------------

Standalone.....	Horizontal: 1.2m	Vertical: 1.7m RMS
DGNSS.....	Horizontal: 0.4m	Vertical: 0.7m RMS
SBAS positioning.....	Horizontal: 0.6m	Vertical: 0.8m RMS
RTK initialization time.....	2 ~ 8s	
IMU tilt compensation.....	Additional horizontal pole tip uncertainty typically less than 10mm + 0.7 mm/° tilt down to 30°	
IMU tilt angle.....	0° ~ 60°	

### Hardware Performance

Dimension.....	165mm(φ) × 108mm(H)
Weight.....	1.35kg (battery included)
Material.....	Magnesium aluminum alloy shell
Operating temperature.....	-30°C ~ +70°C
Storage temperature.....	-40°C ~ +80°C
Humidity.....	100% Non-condensing
Waterproof/Dustproof.....	IP68 standard, fully protected from long time immersion to depth of 1m
	IP68 standard, fully protected against blowing dust
Shock/Vibration.....	Withstand 2 meters pole drop onto the cement ground naturally
Power supply.....	6-28V DC, overvoltage protection
Battery.....	Inbuilt 10000mAh rechargeable, unremovable Li-ion battery
Battery life.....	Static: 20~25hrs
	Base: 10~12hrs
	Rover: 16~20hrs

### Communications

I/O Port.....	5-PIN LEMO external power port + RS232
	Type-C interface (charge + OTG + Ethernet)
	1 UHF antenna interface
	1 PPS output interface
	SIM card slot (Micro SIM)
Internal UHF.....	3W receiver and transmitter
Frequency range.....	410 ~ 470MHz
Communication protocol.....	Farlink, Trimtalk450s, SOUTH, HUACE, Hi-target, Satel
Communication range.....	Typically 15km with Farlink protocol
Cellular mobile network.....	4G cellular network
Bluetooth.....	Bluetooth 4.2 standard, Bluetooth 2.1 + EDR
NFC Communication.....	Realizing close range (shorter than 10cm) automatic pair between receiver and controller (controller requires NFC wireless communication module else)

### WIFI

Modem.....	802.11 b/g standard
WIFI hotspot.....	Receiver broadcasts its hotspot form web UI accessing with any mobile terminals
WIFI datalink.....	Receiver can transmit and receive correction data stream via WIFI datalink

### Data Storage/Transmission

Storage...16GB SSD internal storage standard, extendable up to 64GB	
Automatic cycle storage (The earliest data files will be removed automatically while the memory is not enough)	
Support external USB storage	
The customizable sample interval is up to 20Hz	
Data transmission.....	Plug and play mode of USB data transmission
Supports FTP/HTTP data download	
Static data format.....	STH, Rinex2.x, Rinex3.x
Differential data format.....	CMR, RTCM 2.x, RTCM 3.x(MSM included)
Position output data format.....	NMEA0183, PJK plane coordinate, SBF
Network model supports.....	Fully support NTRIP protocol

### Sensors

Electronic bubble.....	Controller software can display electronic bubble, checking leveling status of the carbon pole in real-time
IMU.....	Built-in IMU module, calibration-free and immune to magnetic interference
Thermometer.....	Built-in thermometer sensor, adopting intelligent temperature control technology, monitoring and adjusting the receiver temperature

### User Interaction

Operating system.....	Linux
Buttons.....	Dual-button
Indicators.....	3 LED indicators
Display.....	1.3-inch color touch screen
Web interaction.....	With the access of the internal web interface management via WiFi or USB connection, users are able to monitor the receiver status and change the configurations freely
Voice guidance.....	It provides status and operation voice guidance, and supports Chinese/English/Korean/Spanish/Portuguese/Russian/Turkish
Secondary development.....	Provides secondary development package, and opens the OpenSIC observation data format and interaction interface definition
Cloud service.....	The powerful cloud platform provides online services like remote manage, firmware update, online register and etc.

\*The data comes from the SOUTH GNSS Product Laboratory, and the specific situation is subject to local actual usage.