



GeoPuls


Handheld Laser RTK



Laser survey



IMU TILT

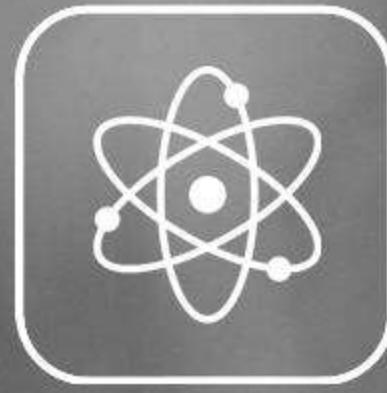

FULL GNSS



4G



IP67

Handheld Laser RTK

GeoPuls is a RTK instrument with laser function. Its appearance is bold and innovative, and its performance is excellent. Based on the experience of the previous generation of laser equipment, we have made more improvements, including no more frequent calibration, and the use of green laser to solve the problem of difficult to aim in bright light. In a real sense, it realizes measure where you aim, and replacing the pole in the traditional measurement method. However, we are also compatible with the pole mode, which allows the laser measurement to be used even when the pole is used. GeoPuls is a product that surveyors really need.




GeoPuls



Military-level technology

Military-level processing technology, complete electromagnetic compatibility and shielding technology, minimize system electromagnetic interference, and ensure high-quality observation data and results.

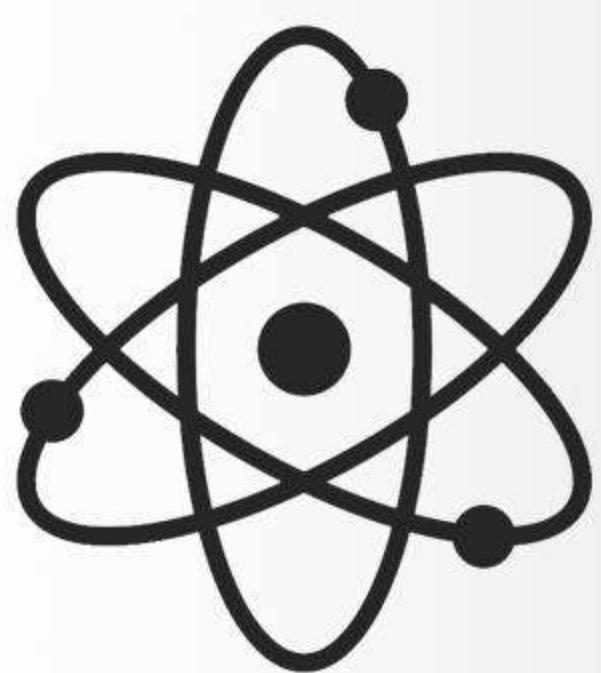

Multi constellation

GeoPuls with its 1408 channels new generation full GNSS chipset ability to support multiple satellite constellation including GPS, GLONASS, BEIDOU, GALILEO, OZSS, SBAS and IRNSS provide precise and accurate spatial data for all users around the world.

IMU Tilt Sensor

GeoPuls is equipped with a fast initialization, calibration free and immune to magnetic interference inertial Measurement Unit(IMU). All users can use this technology to collect or stakeout topo points up to 120°.



Laser Surveying

The world's exclusive patented laser coordinate measurement quick calibration technology can easily achieve centimeter-level measurement accuracy, making measurement more accurate and user-friendly. Besides the green laser module used in the equipment overcomes the difficulty of aiming under sunlight, making field measurement operations faster and more efficient.

Dual-mode Bluetooth

It supports Basic Rate and Enhanced Data Rate operation of traditional Bluetooth, and also supports the latest low-power standard, dual-mode industrial-grade high-speed SPP3.0+ble5.0, suitable for Android/ISO/PC.



GSM

A fast internet connection is guaranteed with a built-in 4G module that accelerates receiving correction data using all telecommunication signals and bands.

4G

IP67

Strictly measured IP67 waterproof and dustproof grade, sturdy and durable, completely suitable for harsh outdoor environments.



(G)
M
C
T
C
L
W



SPECIFICATIONS

Performance specification

| | |
|--|--|
| Satellite signals tracked simultaneously | GPS: L1 C/A, L2C, L2P, L5 GLONASS: L1, L2 BEIDOU: B1, B2, B3, B1C, B2a, B2b GALILEO: E1/E5a/E5b/E6 QZSS: L1/L2/L5/L6 SBAS: WAAS, EGNOS, MSAS, GAGAN, SDCM |
| Channels | 1408 channels |
| Cold start | <60 s |
| Hot start | <15 s |
| Positioning output rate | 1Hz–50Hz |
| Signal Reacquisition | <1s |
| RTK Initialization time | <5s |
| Initialization Reliability | >99.99% |
| Time accuracy | 20 ns |

Positioning

| | |
|-----------------------|--|
| Static GNSS surveying | Horizontal: ±(2.5mm + 0.5ppm) Vertical: ±(5mm + 0.5ppm) |
| RTK surveying | Horizontal: ±(8mm + 1.0ppm) Vertical: ±(15mm + 1.0ppm) |
| Laser surveying | ±1cm + 5mm/m |

Communication & Data Storage

| | |
|--|-----------------------------|
| I/O interface | USB TypeC |
| Cellular | |
| Integrated full frequency multi band 4G modem, supports WCDMA/CDMA2000/TDD-LTE/FDD-LTE | |
| Bluetooth | |
| Dual-mode Bluetooth | |
| Data format | |
| Differential data | RTCM2.X, RTCM3.X |
| GPS output data format | NMEA 0183s RTK, Binary code |

1-Precision and reliability may be subject to anomalies due to multipath, obstructions, satellite geometry, and atmospheric conditions. The specifications stated recommend the use of stable mounts in an open sky view, EMI and multipath clean environment, optimal GNSS constellation configurations. Base lines longer than 30 km require precise ephemeris and occupations up to 24 hours may be required to achieve the high precision static specification.

ELECTRYCAL

| |
|----------------------------------|
| Power: 5V/2A |
| Support USB Type-C fast charging |
| Internal 3350 mAh battery |
| Battery Life >12 h |

Hardware

| | |
|-----------------------|--|
| PHYSICAL | |
| Material | Polymer Engineering Materials |
| Dimensions | 136.5×65×56(mm) |
| Weight | 300g |
| Key | Power button |
| Indicator | Power indicator, data link indicator, satellite indicator, Bluetooth indicator |
| Operating temperature | -20°C to + 75°C |
| Storage temperature | -40°C to + 85°C |
| Protection IP | IP67 dust proof, protected from 30min immersion to depth of 1m |
| Shock | Survive 2 m drop onto the concrete |
| Vibration | MIL-STD-810G |
| Humidity | 100%, condensing |

IMU

| | |
|-----------------------|---|
| IMU | Supported, 4D IMU initialization in 3 seconds |
| IMU update rate | 400Hz |
| IMU accuracy | <2.5cm within 120° |
| IMU tilt compensation | 0-120° |

GUANGZHOU ALPHA GEO-INFO CO.,LTD

Address: Building C, Runhui Science and Technology Park, Shenzhou Road, Huangpu District, Guangzhou 510663, Guangdong, China

Website: www.alphageo-info.com

E-mail: alphageo@aliyun.com

Phone: +861865149475

Where Precision Meets Innovation

